


PAS /PFV Series

45kVA~2000kVA

CE

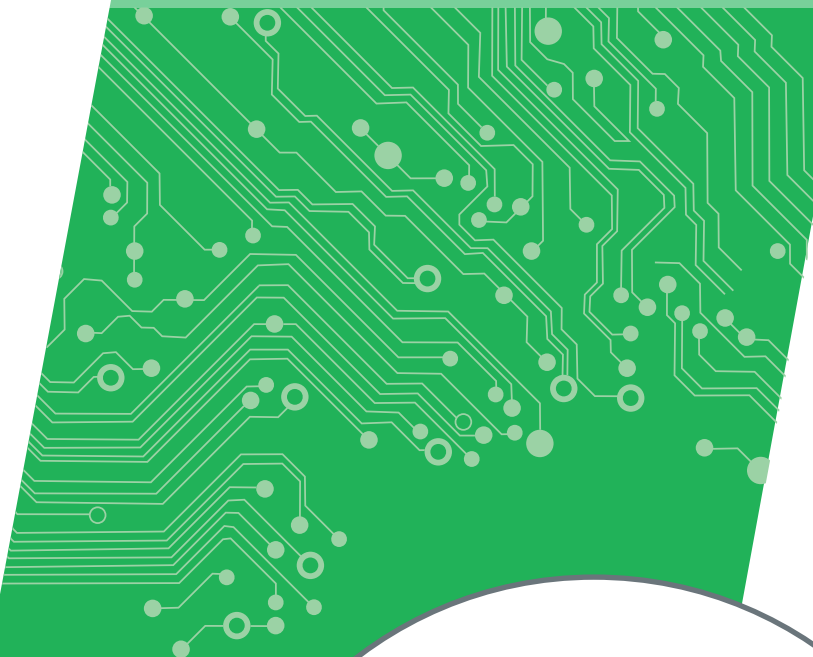

Regenerative Grid
Simulator

INTEPRO
SYSTEMS

THE POWER TEST EXPERTS

www.InteproATE.com

Preen[®]

PAS /PFV Series

Regenerative Grid Simulator

45kVA~2000kVA




- PAS has built-in low voltage ride through (LVRT) mode, which can be easily used for simulating the voltage drop test according to different test standards.
- PAS/PFV equip with energy feedback feature that feeds energy back into the grid system for saving energy and sinking the power from grid tie devices.
- PAS series is suitable for standard verification. For example: UL1741, IEEE 1547, BDEW, and CEI0-16 etc.
- Three phase independent voltage adjustment is suitable for three phase unbalance testing or multiple single phase test units. It also equips with phase angle adjustment.
- Standard RS-232, RS-485 communication interface, optional GPIB, Ethernet and USB.
- With 7 inch LCD touch screen display, it can display output voltage, current, frequency, active/apparent power, power factor, test information at the same time.
- More protection mechanism, detect output undervoltage overvoltage, overcurrent, over load, input undervoltage/overvoltage, over temperature... etc 20 fault conditions and record 255 operation and alarm information for troubleshooting and analysis.
- Step or gradual mode programmable memories can be used for simulate abnormal power condition and run in automatically sequences, which allows you to setup different voltage and frequency in each steps for your power simulation requirements.

Interfaces

RS-232

RS-485

GPIB

Ethernet

USB

● Standard

● Option

Applications

- Laboratory/Certification Bureau
- Electric Vehicles
- Renewable Energy
- Motor & Compressor

PAS Series


PAS Series product is developed for renewable energy related applications. It can simulate the various grid conditions and related test standards. Especially the voltage or frequency transient simulation test feature, it is very suitable for production, quality verification, research and development. It also builds in with Low Voltage Ride Through Test (LVRT) test function, step mode and gradual mode programmable capability.

PFV Series is a new generation of programmable AC power supply, with four quadrant energy feedback function.

This unit not only provides power to the EUT, but also sinks the power back to the grid system which is very useful for grid tie devices testing applications.

The maximum output power for PAS series is up to 2000kVA, and the PFV series is up to 200kVA. The output voltage range is 0~300V-L-N and the standard output frequency is 45~65Hz continuously adjustable (optional 40~70Hz).

Regenerative Function

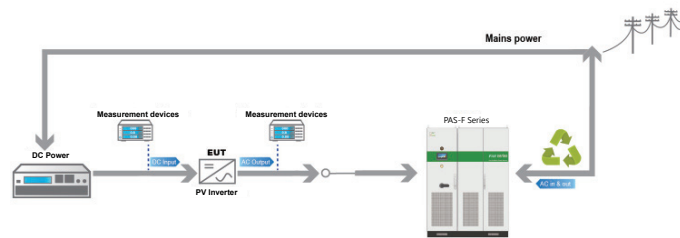

PAS series is a four-quadrant AC power source which is capable to be a power source or sink the power from the EUT back to the grid system with 90% efficiency. It is suitable for PV Inverter test, EV charger test or other grid tie devices test.

Build in with Low Voltage Ride Through (LVRT) test graph and it is very suitable for IEEE-1547 or BDEW related standards compliance test.

Product Features

1. Excellent Regulation Rate

Load regulation rate is less than 1%

2. High Efficiency

Efficiency up to 92%

3. High Output Power quality

Clean output sinewave and low impact to the input grid system.

○ THD (Harmonic distortion) $\leq 2\%$ ○ ITHD (input current harmonic) $\leq 5\%$

○ PF (input power factor) 0.99


4. Built-in Features

LVRT/HVRT simulations



5. Four Quadrant AC Source

Capable to regenerate and recycle the power

Low Voltage Ride Through (LVRT)






Low Voltage Ride Through (LVRT) Mode



Built-in Low Voltage Ride Through (LVRT) mode can simulate the grid in abnormal conditions.

The settings include rated voltage, frequency, drop voltage, recovery voltage, rise time and drop time to simulate various grid conditions.

A Variety of Built-in Programmable Features



PAS/PFV series has a number of programmable features that can effectively and accurately simulate a variety of power abnormal conditions or disturbance. Through the built-in step and gradual mode, users can simulate voltage and frequency single-step or continuously changes, such as voltage and frequency ramp up/ ramp down, instantaneous changes, and so on. Phase angle and three phase independent adjustment function can be used for simulating three phase imbalance and further test the reliability of the EUT. With low voltage ride through and regenerative function, PAS series is suitable for PV Inverter, Bi-directional EV charger, Energy Storage System as an all purpose grid system simulator.

Model Comparison

Model series	PAS	PFV	AFV
General Mode	○	○	○
Step Mode	○	○	○
Gradual Mode	○	○	○
Soft Start Function	△	△	△
Three-phase independent adjustment	○	○	△
Phase Angle Setting	○	○	△
Low Voltage Ride Through (LVRT)	○	-	-
Regenerative Function	○	○	-

○ Standard △ Optional - N/A

SPECIFICATIONS

PFV Series & PAS-F Series three-Phase Output (45kVA - 200kVA)

Model	PFV-33045		PFV-33060		PFV-33075		PFV-33100		PFV-33120		PFV-33150		PFV-33200	
	PAS-F-33045		PAS-F-33060		PAS-F-33075		PAS-F-33100		PAS-F-33120		PAS-F-33150		PAS-F-33200	
INPUT														
Phase	3Ø / 4 Wire + G													
Voltage ^{*1}	380V±15%													
Frequency	47 - 63Hz													
Max. Current ^{*2}	86A	115A	150A	200A	240A	300A	400A							
Power Factor	≥ 0.99 (Max. Power)													
OUTPUT														
Power	VA	45kVA	60kVA	75kVA	100kVA	120kVA	150kVA	200kVA						
Phase	3Ø / 4 Wire + G													
Voltage Ranges	Low(V)	0V~150.0V (L-N)												
PFV Series	High(V)	0V~300.0V (L-N)												
Voltage Ranges	PAS-F Series	0V~300.0V (L-N)												
Voltage Resolution	0.1V													
Voltage Accuracy	0.15% F.S.+4 counts													
Frequency Range	Standard : 45 ~ 65Hz Option : 40-70Hz													
Frequency Resolution	0.1Hz													
Frequency Accuracy	±0.1% F.S													
Max. Current(RMS)	Low(A)	125A	166.7A	208.3A	277.8A	333.3A	416.7A	555.6A						
PFV Series	High(A)	62.5A	83.3A	104.1A	138.9A	166.6A	208.3A	277.8A						
Max. Current(RMS)	PAS-F Series	62.5A	83.3A	104.1A	138.9A	166.6A	208.3A	277.8A						
Line Regulation	< 1%													
Load Regulation	< 1% (Resistive Load)													
Total Harmonic Distortion (THD)	≤ 2% (Resistive Load)													
Response Time	≤ 2ms													
MEASUREMENT														
Voltage Range	0V~300.0V													
Voltage Resolution	0.1V													
Voltage Accuracy	0.1%F.S.+2 counts													
Frequency Range	Standard : 45 ~ 65Hz Option : 40-70Hz													
Frequency Resolution	0.01Hz													
Frequency Accuracy	±0.01% F.S.													
Current Range (RMS)	0 ~ 9999A													
Current Resolution (RMS)	0.1A													
Current Accuracy (RMS)	0.1% F.S.+2 counts													
Power Range	0-400kW													
Power Resolution	0.1kW													
Power Accuracy	0.2% F.S.+2 counts													
GENERAL														
Regenerative Function	YES													
Low Voltage Ride Through (LVRT)	PAS Series : YES , PFV Series : NO													
Three-phase independent adjustment	YES													
Phase Angle Setting	YES													
Efficiency	≥ 92% at Max. Power													
HMI	Touch Screen, 7" Color TFT LCD													
Protection	Input : Input N.F.B, Over Voltage, Under Voltage, Output : Over Voltage, Over Current, Reverse Current, Over Temperature													
Remote Interface	Standard : RS-485, RS-232 Option : GPIB , USB , Ethernet													
Operational Temperature	0°C ~45°C													
Humidity	0~90% (Non condensing)													
Altitude	< 1,500 m													
Dimensions (H x W x D)	2100 x 1200 x 800mm				2100 x 1600 x 800mm									
	82.67 x 47.24 x 31.49inch				82.67 x 62.99 x 31.49inch									
Weight	1050kg	1185kg	1485kg	1919kg	2300kg	2700kg	3400kg							
	2314.9lbs	2612.5lbs	3273.9lbs	4230.7lbs	5070.6lbs	5952.5lbs	7495.7lbs							

*1 Please contact for other voltage specification.

*2 The rated input voltage is 380V.

* all specifications are subject to change without notice.

ORDERING INFORMATION :

PAS-F Series three-Phase Output (45kVA - 200kVA)

Model Number	Description
PAS-F 33045	Regenerative Grid Simulator (45kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33060	Regenerative Grid Simulator (60kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33075	Regenerative Grid Simulator (75kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33100	Regenerative Grid Simulator (100kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33120	Regenerative Grid Simulator (120kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33150	Regenerative Grid Simulator (150kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 33200	Regenerative Grid Simulator (200kVA/300V/45-65Hz, Including LVRT Testing)
PAS-F 001	Soft Start Function
PAS-F 002	GPIB Interface
PAS-F 003	Ethernet Interface
PAS-F 004	USB Interface
PAS-F 005	Output Frequency 40-70Hz

PFV Series three-Phase Output (45kVA - 200kVA)

Model Number	Description
PFV-33045	High Power Programmable AC Power Source (45kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33060	High Power Programmable AC Power Source (60kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33075	High Power Programmable AC Power Source (75kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33100	High Power Programmable AC Power Source (100kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33120	High Power Programmable AC Power Source (120kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33150	High Power Programmable AC Power Source (150kVA/300V/45-65Hz, Including Regenerative Function)
PFV-33200	High Power Programmable AC Power Source (200kVA/300V/45-65Hz, Including Regenerative Function)
PFV-001	Soft Start Function
PFV-002	GPIB Interface
PFV-003	Ethernet Interface
PFV-004	USB Interface

Contact Us

sales@inteproate.com

Americas

Intepro Systems America,LP
14662-E Franklin Ave
Tustin,CA 92780
Tel : 1 714 953 2686

service@inteproate.com

Europe

Intepro UK Ltd.
9 Lakeside Business Park
Swan Lane , Sandhurst Berkshire
GU47 9DN / UK
Tel : 44 012 5287 5600

www.inteproate.com

Asia-Oceania

**Intepro Power Electronics
(Shenzhen) Co.,Ltd**
No.828, Block 7,
Fourth Industrial Area
Nanyou, Nashan District
Shenzhen, China 518052
Tel: 0086 755 86500020